

A revolutionary yet simple & unique drive system to suit Roller Shutters & Outdoor Blinds.

OZROLL DRIVE SYSTEM

The OZ Drive system is a low voltage battery operated drive system that is not reliant upon mains power. With operation at the touch of a button this unique system offers a cost effective alternative to current control options with many other additional benefits including a more efficient installation.

The motor can be fitted into the axle (T20 Tubular Motor) or mounted on the end plate (L10 Lateral Motor). Each motor is equipped with a low voltage cable which is connected directly to the back of the wall plate or to the fixed switch allowing for power to be generated through the motor.

The E-Port 18650 controller is removable and can be used to operate more than one roller shutter further highlighting the overall cost efficiency of the system. The controllers are equipped with a re-chargeable battery that can be easily charged via a number of convenient options.

CONTROLS



E-PORT REMOVABLE CONTROLLER

- Designed for use in Multiple Shutters
- Available in RF & Non RF
- Long life Li-Ion Batteries
- Safe and simple charging
- Suits both the Tubular Motors & L10 Mech



E-TRANS

- Hand held remote with wallplate
- Available in both Single & Nine Channel
- "Star" Button to access Favourite Function located on the E-Fix
- Limitless range of Programming Features
- User friendly Programming Ability




E-3 WAY

- Allows for Three (3) Shutters to be operated by a Single Controller
- Simple & Effective Wiring Process
- Ideal for Bay or Box Windows
- Electronic Switching therefore can determine the 'Default' Shutter

E-SOLAR PRO

- No charging required
- Environmentally friendly
- Simple Installation
- Stand alone system

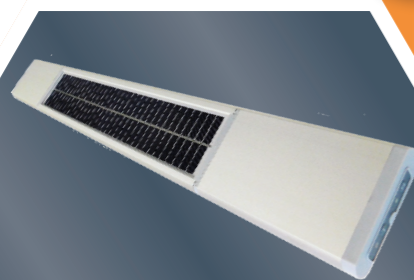

LOW VOLTAGE

Battery Operation.
Not Reliant on mains power.



CHARGING

is both simple and convenient.



PERFECT

for Narrow Roller Shutters.



ADAPTABLE

for use on Outdoor Blinds.



INSTALLATION

is simple, safe and cost effective.



TOTAL CONTROL

Available in RF (radio frequency) with Remote Control.



IDEAL

for Retro Fitting to existing shutters.



MULTIPLE SHUTTERS OR BLINDS

can be operated with a single controller.



SIMPLE OPERATION

for the whole family.



FEATURES AND BENEFITS




MOTORS & END PLATE



SCAN TO LEARN MORE

DC-08 & DC-15

- Power equivalent to 8nm & 15nm
- Lifting capacity up to 13kg for DC-08 & 23kg for DC-15
- Slimmer design with a 35mm tube
- Alternative to the L10

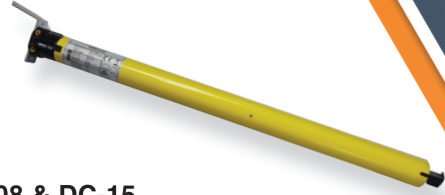

L-10

- Fitted to the side plate 165mm & above
- Ideal for narrow shutters
- Innovative down stop limit within the mechanism
- Automatic limit settings
- Right or left side installation

T20


- Lifting capacity equal to 32kg - add power equivalent to 20Nm
- Mechanical limit settings
- Built in overload protection
- Allows for smaller head box sizes



T35


- Power equivalent to 35Nm
- Lifting capacity equal to 55kg
- Designed with a 45mm Tube
- Ideal for use on a Sentry AE401 Extruded Roller Shutter
- Enormous output for its compact size

4 Shutters, 4 Wallplates, 1 E-Port




Multiple shutters can be operated with a single controller

3 Shutters, E-3 Way




3-Way switch with a single controller

4 Shutters, 4 E-Port RF, E-Trans Remote



RF Controls with a Remote Control

Small Access Hole For Wiring

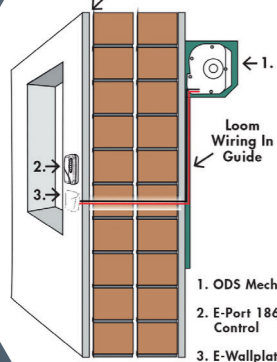

1. ODS Mech
2. E-Port 1865 Control
3. E-Wallplate



SERIES

BY OZROLL

Simple and Unique Drive System